

Motors and gearboxes

Torque motors

IndraDyn T - for maximum torque



Motors and gearboxes

Torque motors ■ IndraDyn T - for maximum torque

Documentation
Project Planning
Manual



Powerful and direct

- Maximum torques of up to 13,800 Nm
- Full torque even at standstill
- Extremely high overload capacity
- Liquid cooling with thermal encapsulation
- Easy assembly

The IndraDyn T torque motors are liquid-cooled kit motors which have been optimized for high torques of up to 13,800 Nm. They consist of a stator with three-phase winding and a rotor with permanent magnets.

Typical areas of application for these motors mainly include direct drives in rotary tables or swivel axes in machining centers or printing units. However, they also offer innovative new approaches to solutions in machine design using robots, plastics processing machines, woodworking machines, lathes and special purpose machines.

The "cooling jacket" option on the MST stators consists of a closed-circuit cooling jacket, mounting flange and electrical connection via terminal box or plug. The rear side of the cooling jacket is open, and the rotor is connected to the machine shaft and bearing. This features an optimal mix of standard solution and design freedom for integrating direct-drive technology. Reduced design effort and service-friendly installation offer substantial additional cost advantages.

Technical data**Electrical data**

Type	Rated speed	Maximum speed	Rated torque	Maximum torque	Rated output	Rated current	Maximum current	Moment of inertia
	n N	n Max	M N	M Max	P N	I N	I Max	J
	[1/min]	[1/min]	[Nm]	[Nm]	[kW]	[A]	[A]	[kgm²]
MST130A-0200	2000	4000	9	15	1.88	7.5	16	0.0008
MST130C-0050	500	1200	25	40	1.31		12	0.0018
MST130C-0200	2000	3500			5.24		15.2	
MST130E-0020	200	700	42	65	0.88	7.5	12	0.0029
MST160A-0050	500	1000	35	90	1.83	6.5	20	0.0059
MST160C-0050			70	180	3.67	13	40	0.0108
MST160E-0050			105	270	5.5	19.5	60	0.0158
MST210A-0027	270	600	50	100	1.4	7	25	0.012
MST210C-0027			120	250	3.4	13	50	0.023
MST210C-0050	500	1200			6.9	25	100	
MST210D-0070	700		150	300	11	32	120	0.027
MST210E-0027	270	600	240	500	6.8	24	90	0.042
MST290B-0018	180	350	220	460	4.1	14.8	60	0.08

Motors and gearboxes

Torque motors ■ IndraDyn T - for maximum torque**Electrical data**

Type	Rated speed	Maximum speed	Rated torque	Maximum torque	Rated output	Rated current	Maximum current	Moment of inertia		
	n N	n Max	M N	M Max	P N	I N	I Max	J		
	[1/min]	[1/min]	[Nm]	[Nm]	[kW]	[A]	[A]	[kgm²]		
MST290D-0002	25	90	350	700	0.9	6.3	25	0.11		
MST290D-0004	45	150			1.65	10.4	30			
MST290D-0018	180	350			6.6	26	100			
MST290E-0004	40	130	575	1150	2.4	12.5	50	0.17		
MST290E-0018	180	350			10.8	35	125			
MST360B-0018		330			7.1	20	70		0.19	
MST360D-0012	120	250	525	1150	6.6	16.5	60	0.27		
MST360D-0018	180	300			9.9	28	100			
MST360E-0018					875	1900	16.5		42	141
MST450B-0012	120	250	540	1200	6.8	22	70	0.45		
MST450D-0006	60	130	810	1800	5.1	18.8	50	0.64		
MST450D-0012	120	250			10.2	33	100			
MST450E-0006	60	120	1400	3250	8.8	32	88	1.01		
MST450E-0012	120	220			17.6	46	125			
MST530B-0010	100	200	800	1800	8.4	28.6	71	0.92		
MST530C-0010		150	1200	2700	12.6	31.2	88	1.25		
MST530E-0010		200	2100	4700	22	64	212	1.92		
MST530G-0006	60	120	4200	9200	26.4	76	240	3.84		
MST530G-0007	70	130			31	96	305			
MST530G-0010	100				44	116.8	350			
MST530L-0006	60	100	6300	13800	39.6	120	380	5.76		
MST530L-0007	70				46.2	133	420			

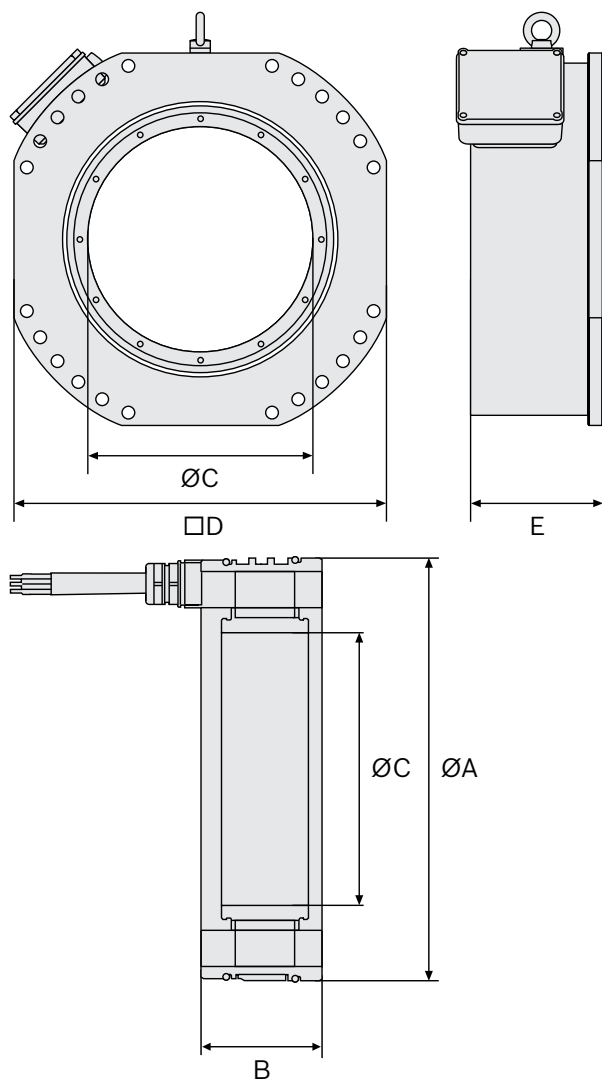
All the specifications relate to operation with liquid cooling and 540 V DC bus voltage.

Mass values stator/rotor with open cooling jacket

Mass values depends on rotor version

Dimensions

Motors and gearboxes

Torque motors ■ IndraDyn T - for maximum torque

Type	Ø A	B	Ø C	D	E	Mass			
	[mm]	[mm]	[mm]	[mm]	[mm]	Stator [kg]	Rotor [kg]		
MST130A-0200	150	63	60	0	0	2.4	0.65		
MST130C-0050		103				5.1	1.5		
MST130C-0200		143				7.7	2.21		
MST130E-0020		95				5.6	2.4		
MST160A-0050	180	145	80			9.6	4.3		
MST160C-0050		195				13.9	6.2		
MST160E-0050									

Motors and gearboxes

Torque motors ■ IndraDyn T - for maximum torque

Type	Ø A	B	Ø C	D	E	Mass	
	[mm]	[mm]	[mm]	[mm]	[mm]	Stator [kg]	Rotor [kg]
MST210A-0027	230	75	120	260	140	7.2	3
MST210C-0027		120			185	11.5	4.8
MST210C-0050					215		
MST210D-0070		150			185	13.8	5.8
MST210E-0027		195			260	18.8	7.8
MST290B-0018	310	105	200	385	172	13.5	6.2
MST290D-0002		135			202	20	9
MST290D-0004							
MST290D-0018		195			262	25.1	11.6
MST290E-0004							
MST290E-0018							
MST360B-0018	385	120	260	450	195	23	9.8
MST360D-0012		150			225	28.8	13.5
MST360D-0018					285	40.3	20.9
MST360E-0018							
MST450B-0012	480	120	350	570	200	31	13
MST450D-0006		150			230	38.7	17.9
MST450D-0012					290	54.2	27.7
MST450E-0006							
MST450E-0012							
MST530B-0010	565	120	410	645	200	36	22
MST530C-0010		150			230	45	27.5
MST530E-0010		210			290	63	38.5
MST530G-0006		370			455	144	77
MST530G-0007							
MST530G-0010							
MST530L-0006		520			605	205	115
MST530L-0007							

Bosch Rexroth AG

Postfach 13 57
97803 Lohr, Germany
Bgm.-Dr.-Nebel-Str. 2
97816 Lohr, Germany
Tel. +49 9352 18-0
Fax +49 9352 18-8400
www.boschrexroth.com/electrics

Local contact information can be found at:

www.boschrexroth.com/adressen

The data specified above only serve to describe the product.
As our products are constantly being further developed, no
statements concerning a certain condition or suitability for a certain
application can be derived from our information. The information
given does not release the user from the obligation of own judgment
and verification.
It must be remembered that our products are subject to a natural
process of wear and aging.