
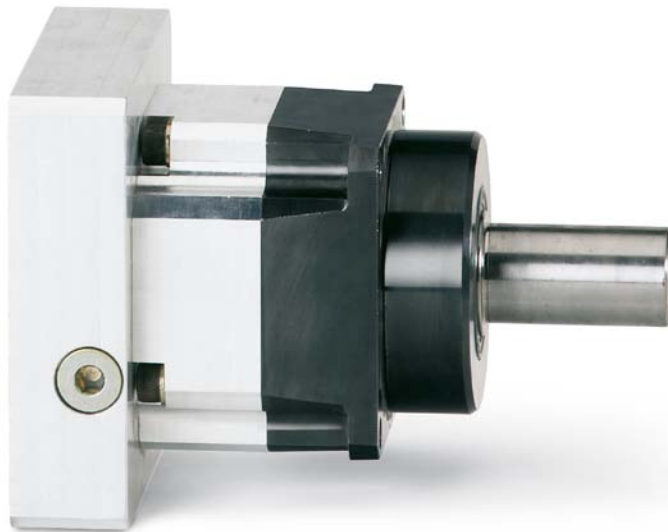


Motors and gearboxes

Servo gearboxes

GTM – for precision applications

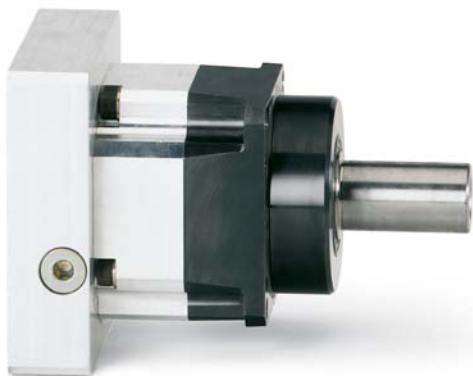

**High-precision and flexibility**

- High-precision gearing for highest positioning accuracy
- minimum
-
- power dissipation in continuous operation
- minimum
- Optimized gear tooth forming for silent operation
- Environment-resisant, hermetically sealed housing
- High acceleration torque is achievable through a compact and rigid construction

Characterized by a particularly high power density and low backlash, the high-precision GTM range of planetary gearboxes has been designed for mounting directly on servo motors. Their high degree of efficiency makes these gearboxes suitable for S1 continuous operation and therefore ideal for use in printing presses, for example.

Combined with the dynamic IndraDyn motors they achieve the highest speeds, acceleration and optimum positioning accuracy. The single-stage or two-stage gearboxes can be supplied with a plain shaft or keyway and also with reduced backlash on request.

Technical data

Gearbox	Transmission ratio	i	Nominal input speed	Max. input speed	Max. output speed	Nominal input torque	Nominal output torque		Max. output torque	Backlash		Torsional stiffness	Efficiency	Moment of inertia	
										Standard	Reduced				
			n												
			IN N												
			[1/min]	[1/min]	[1/min]	[Nm]	[Nm]		[Nm]	[arc-min]	[arc-min]	[Nm/arc-min]	[%]	J	
GTM060-NN1-004	Single-stage	4	3000	5000	1250	6.25	25	12.5	50	≤ 6	≤ 3	3.5	97	0.16	
GTM060-NN1-005		5	4000	6300	1260	5		10			≤ 3				
GTM060-NN1-007		7	5000	8000	1143	3.6		7.1			≤ 3				
GTM060-NN1-010		10	6000	10000	1000	2	4	40	≤ 3		0.14				
GTM060-NN2-020	Two-stage	20	4000	6300	315	1.25	25	2.5	50	≤ 8	≤ 6		94	0.12	
GTM060-NN2-050		50	6000	10000	200	0.5		1			≤ 6			0.1	

Motors and gearboxes

Servo gearboxes ■ GTM – for precision applications

Gearbox	Transmission ratio	i	Nominal input speed	Max. input speed	Max. output speed	Nominal input torque	Nominal output torque		Max. output torque	Backlash		Torsional stiffness	Efficiency	Moment of inertia
										Standard	Reduced			
			n											
			IN N											
			[1/min]	[1/min]	[1/min]	[Nm]	[Nm]		[Nm]	[arc-min]	[arc-min]	[Nm/arc-min]	[%]	
GTM075-NN1-004	Single-stage	4	3000	5000	1250	21.3	85	42.5	170	≤ 6	≤ 3	8.2	97	0.55
GTM075-NN1-005		5	4000	6300	1260	20	100	40	200		≤ 3			0.47
GTM075-NN1-007		7	5000	8000	1143	12.1	85	24.3	170		≤ 3			0.41
GTM075-NN1-010		10	6000	10000	1000	6	60	11	110		≤ 3			0.38
GTM075-NN2-020	Two-stage	20	4000	6300	315	4.25	85	8.5	170	≤ 8	≤ 6		94	0.47
GTM075-NN2-050		50	6000	10000	200	2	100	4	200		≤ 6			
GTM100-NN1-003	Single-stage	3	2300	4000	1333	40	120	73.3	220	≤ 4	≤ 2	24	97	2.8
GTM100-NN1-004		4	2500		1000	42.5	170	85	340		≤ 2			2
GTM100-NN1-005		5	3000	5000		40	200	80	400		≤ 2			1.64
GTM100-NN1-007		7	4000	6300		900	24.3	170	48.6		340			≤ 2
GTM100-NN1-010		10	5000	8000	800	12	120	22	220		≤ 2			1.22
GTM100-NN2-020	Two-stage	20	3000	5000	250	8.5	170	17	340	≤ 6	≤ 4		94	1.56
GTM100-NN2-050		50	5000	8000	160	4	200	8	400		≤ 4			1.44
GTM140-NN1-003	Single-stage	3	1800	3200	1067	93.3	280		560	≤ 4	≤ 2	48	97	8.2
GTM140-NN1-004		4	2000		800	105	420	210	840		≤ 2			6.75
GTM140-NN1-005		5	2500	4000		100	500	200	1000		≤ 2			5.54
GTM140-NN1-007		7	3000	5000		714	60	420	120		840			≤ 2
GTM140-NN1-010		10	4000	6300	630	28	280	56	560		≤ 2			4.1
GTM140-NN2-020	Two-stage	20	2500	4000	200	21	420	42	840	≤ 6	≤ 4		94	5.29
GTM140-NN2-050		50	4000	6300	126	10	500	20	1000		≤ 4			4.96

Bosch Rexroth AG

Postfach 13 57
97803 Lohr, Germany
Bgm.-Dr.-Nebel-Str. 2
97816 Lohr, Germany
Tel. +49 9352 18-0
Fax +49 9352 18-8400
www.boschrexroth.com/electrics

Local contact information can be found at:

www.boschrexroth.com/adressen

The data specified above only serve to describe the product.
As our products are constantly being further developed, no
statements concerning a certain condition or suitability for a certain
application can be derived from our information. The information
given does not release the user from the obligation of own judgment
and verification.
It must be remembered that our products are subject to a natural
process of wear and aging.