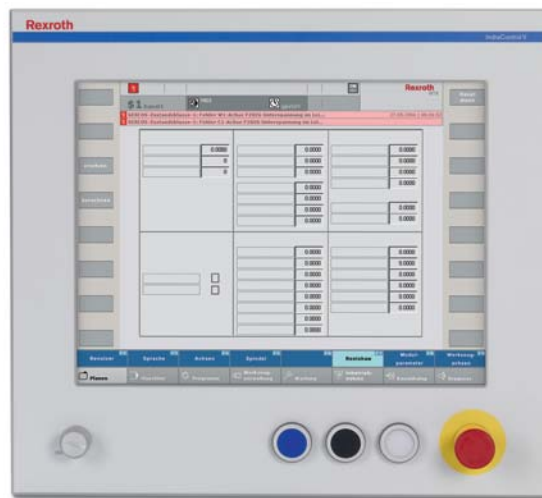


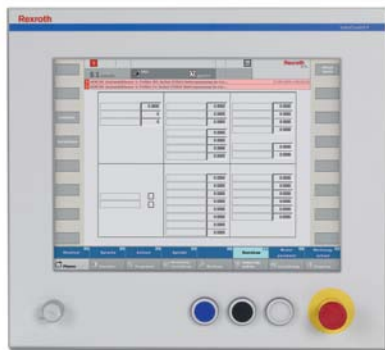
Terminals

# 15" Terminal

## IndraControl VDP 40.3



Terminals

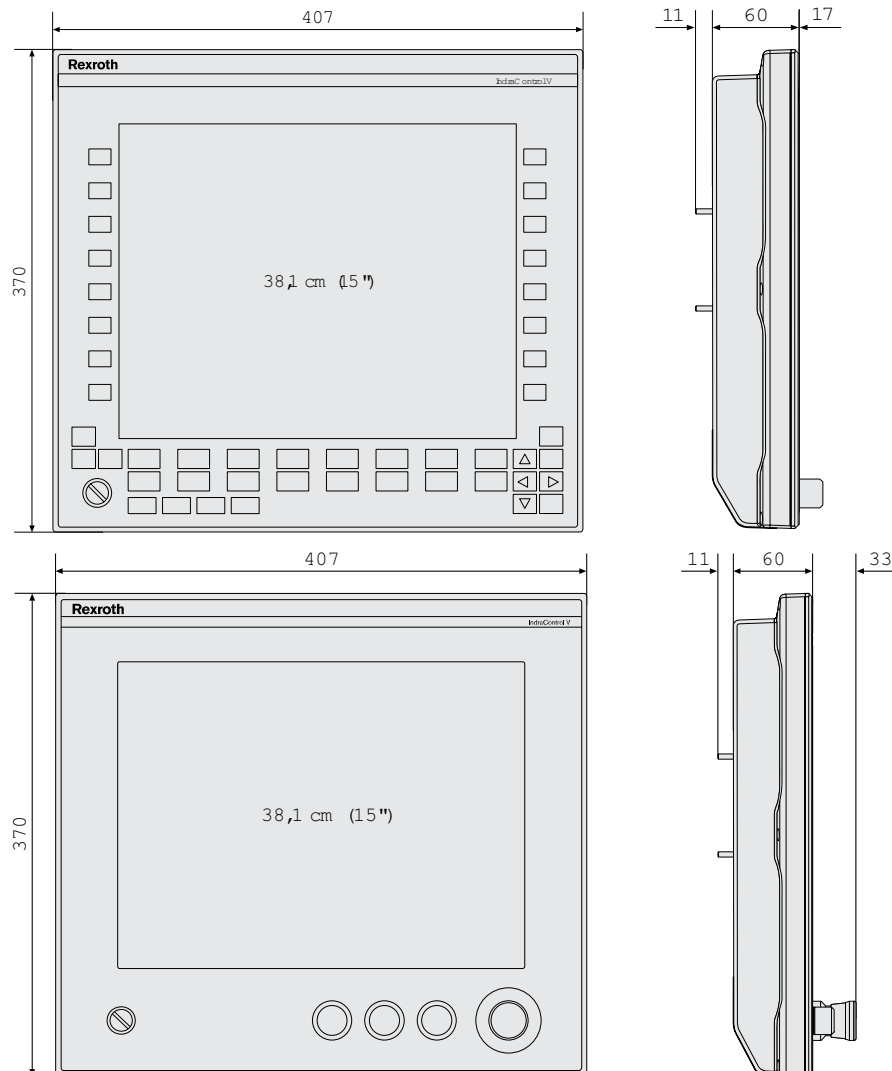
**15" Terminal ■ IndraControl VDP 40.3****Technical data**

		VDP 40.3 DI	VDP 40.3 DF
<b>Display</b>			
Type		TFT	TFT
Size		38.1 cm (15")	38.1 cm (15")
Colors/gray tones		256.000	256.000
		Colors	Colors
Resolution		1024 x 768	1024 x 768
<b>Operation</b>			
Type		touch operation	Touch/key operation
Function keys		0	16
Machine keys		0	16
Operator keys		3	0
Additional keys		1	14
Keyboard		Additional components VAK	Additional components VAK
Status-LED		Voltage	Voltage
		Hard disk	Hard disk
		Temperature	Temperature
		UPS	UPS
<b>Interfaces</b>			
USB		4 x USB	4 x USB
		1 x USB Front	1 x USB Front
Other		1 x CDI interface – connection IPC to display	1 x CDI interface – connection IPC to display
<b>Electrical data</b>			
Supply voltage	U	24 V DC	24 V DC
Min.	U <sub>min</sub>	19 V DC	19 V DC
Max.	U <sub>max</sub>	30 V DC	30 V DC
Power consumption	[W]	35	35

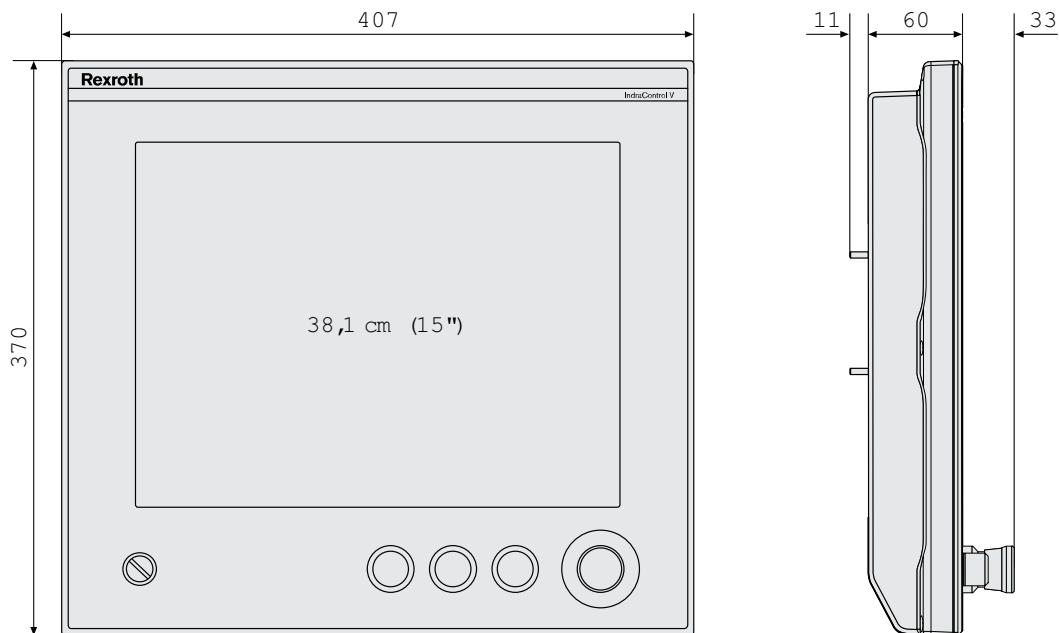
## Terminals

**15" Terminal ■ IndraControl VDP 40.3**

Protection			
Overall protection category		IP54	IP54
Category at front		IP65	IP65
Other			
Colors		Light-grey RAL 7035	Light-grey RAL 7035
Load			
Vibration resistance	[g]	1	1
			1 g
Shock resistance	[g]	15	15
			15 g
Norms and standards			
Certification		CE/UL/CSA	CE/UL/CSA
Ambient conditions			
Permissible temperature (operation)		+5 °C ... +45 °C	
Permissible relative humidity (operation)		5 % ... 85 %, EN 61131-2	

**Dimensions**

Terminals

**15" Terminal ■ IndraControl VDP 40.3**

		VDP 40.3 DI
<b>Dimensions</b>		
Height H	[mm]	370
Width B	[mm]	407
Depth T	[mm]	60

**Ordering information**

Type code	Description	Part number:
R911171059	IndraControl VDP 40 with 38.1 cm (15") display, touch screen, in a housing with switching elements	R911171059

**Bosch Rexroth AG**

Postfach 13 57  
97803 Lohr, Germany  
Bgm.-Dr.-Nebel-Str. 2  
97816 Lohr, Germany  
Tel. +49 9352 18-0  
Fax +49 9352 18-8400  
[www.boschrexroth.com/electrics](http://www.boschrexroth.com/electrics)

**Local contact information can be found at:**

[www.boschrexroth.com/adressen](http://www.boschrexroth.com/adressen)

The data specified above only serve to describe the product. As our products are constantly being further developed, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification.

It must be remembered that our products are subject to a natural process of wear and aging.