

Keyboards

# Membrane keyboard IndraControl VAK 11/41



Keyboards

**Membrane keyboard ■ IndraControl VAK 11/41**

Documentation  
Project Planning  
Manual



VAK 11 and VAK 41 membrane keyboards are sturdy and economical full-size keyboards with a separate number pad.

**Technical data**


		VAK 11.2	VAK 41.2
<b>Operation</b>			
Type		Touch panel (full keyboard)	
Operator keys		85	
Operator keys variable		4	
Function keys		alphanumeric block	
		numeric block	
		keyboard mouse	
<b>Interfaces</b>			
USB		1 x USB (Default)	1 x USB (Default)
<b>Electrical data</b>			
Supply voltage	U	5 VDC	5 VDC
Tolerance		+/-5 %	+/-5 %
Power consumption at nominal voltage	[mA]	30	30
Power consumption	[W]	0.15	0.15
<b>Protection</b>			
Category at front		IP65	IP65
<b>Other</b>			
Connection cable	[m]	1.5	1.5
Connection cable	[m]	1,5 m	1,5 m
Colors		Light-grey RAL 7035	Light-grey RAL 7035
<b>Load</b>			
Vibration resistance	[g]	0.25	0.25
		0.25 g	
Shock resistance	[g]	5	5
		5 g	
<b>Norms and standards</b>			

## Keyboards


**Membrane keyboard ■ IndraControl VAK 11/41**

Certification	CE/UL/CSA	CE/UL/CSA
---------------	-----------	-----------

## Dimensions

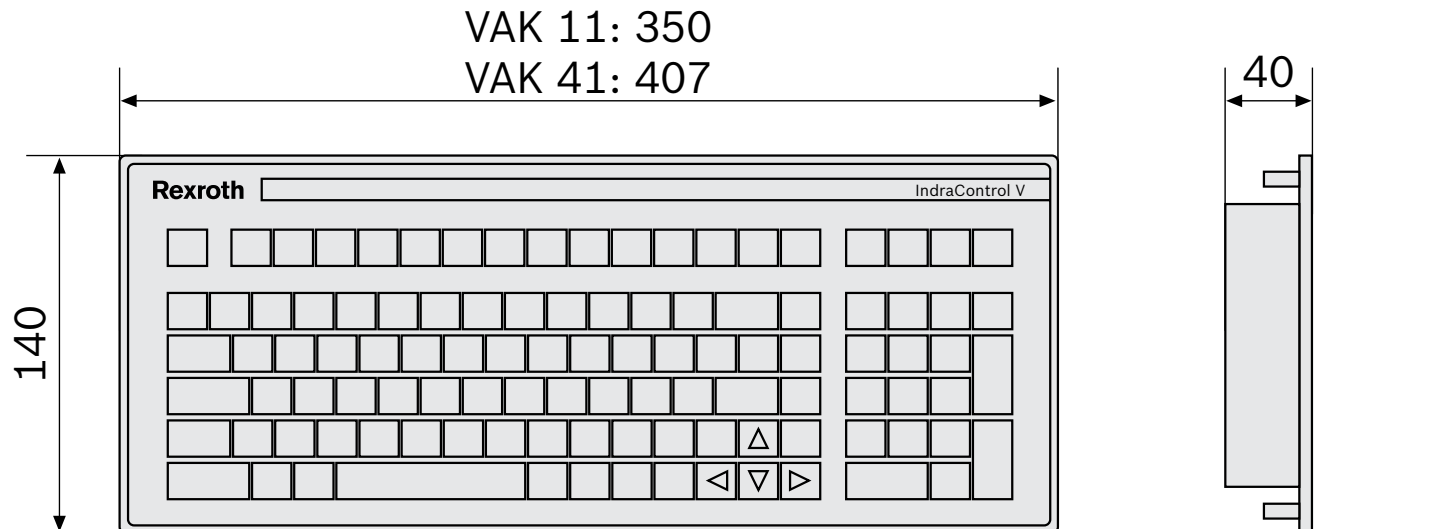

		VAK 11.2	VAK 41.2
<b>Dimensions</b>			
Height H	[mm]	140	140
Width B	[mm]	350	407
Depth T	[mm]	34	34
Panel cutout height H	[mm]	108	108
Panel cutout width B	[mm]	318	375

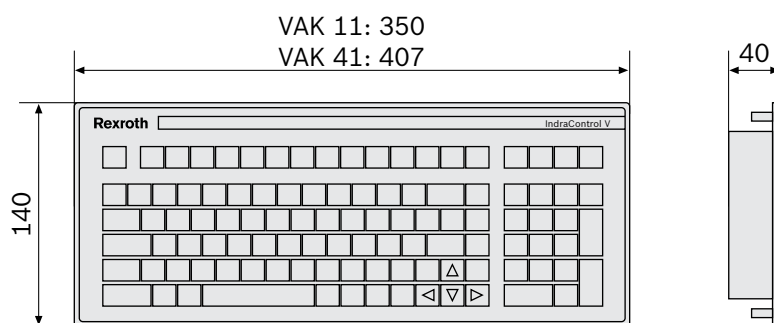

## Ordering information

Type code	Description	Part number:
VAK11.2F-EN-U-NNNN	IndraControl VAK 11 (foil keyboard USB, EN)	R911171076
VAK41.2F-EN-U-NNNN	IndraControl VAK 41 (foil keys USB, EN)	R911171077

Keyboards

**Membrane keyboard ■ IndraControl VAK 11/41**

---

Wörterbuch Überschrift

Type code	Description	Part number:
DOK-SUPPL*-VAK*11/41**-PR03-DE-P	IndraControl VAK 11 and VAK 41 project planning in German	R911310335
DOK-SUPPL*-VAK*11/41**-PR03-EN-P	IndraControl VAK 11 and VAK 41 project planning in English	R911310336

**Bosch Rexroth AG**

Postfach 13 57  
97803 Lohr, Germany  
Bgm.-Dr.-Nebel-Str. 2  
97816 Lohr, Germany  
Tel. +49 9352 18-0  
Fax +49 9352 18-8400  
[www.boschrexroth.com/electrics](http://www.boschrexroth.com/electrics)

**Local contact information can be found at:**

[www.boschrexroth.com/adressen](http://www.boschrexroth.com/adressen)

The data specified above only serve to describe the product. As our products are constantly being further developed, no statements concerning a certain condition or suitability for a certain application can be derived from our information. The information given does not release the user from the obligation of own judgment and verification.

It must be remembered that our products are subject to a natural process of wear and aging.